

# SIRIUS87 - MACROTEST5035

MULTIFUNCTION INSTRUMENTS FOR COMPLETE TESTS ON CIVIL AND INDUSTRIAL ELECTRIC SYSTEMS

SIRIUS87 and MACROTEST5035 are capable of carrying out complete tests on civil and industrial electric systems in compliance with standard IEC/EN61557-1. Thanks to their simple and intuitive use, these instruments allow saving all measurement results in their internal memory and transferring the saved data onto the PC by means of a optical interface in order to print useful measuring reports, to be attached to Declarations of Conformity, with the aid of the dedicated software supplied. SIRIUS87 and MACROTEST5035 also carry out loop/line impedance measurements and calculate the prospective short-circuit current with high-resolution (0.1mΩ) with the aid of the optional accessory IMP57. In this way, it is possible to obtain precise measurement results, also near HV/LV transformation cabs, where the inductive effect due to the presence of the transformer is significant, and therefore also allows correctly choosing the appropriate protections in industrial systems.

## FUNCTIONS

- Continuity of protective conductors with 200mA
- Insulation resistance with 50,100,250, 500,1000VDC
- Line/Loop impedance Phase-Phase, Phase-Neutral, Phase-PE also with high-resolution (0.1mΩ), with optional accessory IMP57
- Prospective short circuit current
- Contact voltage
- AC voltage and frequency
- Tripping time and current on RCDs type A, AC General and Selective with 10,30,100,300,500mA
- Global earth resistance without RCD tripping
- Earth resistance by 2-wire and 3-wire method
- Ground resistivity with 4-wire method
- Phase sequence indication
- Storage in memory up to 350 measurement results
- Optical/USB interface for communication to PC
- Power supply: 6x1.5V alkaline batteries type AA LR03
- Safety: IEC/EN61010-1, CAT III 265V (to ground), CAT III 460V (between inputs)
- Dimensions (LxWxH): 222x165x105mm
- Weight (batteries included): 1.2kg

## ACCESSORIES

### Standard

3-terminal cable with SHUKO plug	C2033X
Set of 4 cables + 4 alligator clips + 2 test leads	KITGSC5
Set of 4 cables + 4 metal earth probes	KITTERRNE
PC Windows software + optical / USB cable	TOPVIEW2006
Carrying bag	BORSA2051
ISO9000 calibration certificate	
User manual	

### Optional


Accessory for Loop impedance with high resolution	IMP57
Set of straps for carrying belt	CN0050
Magnetic adapter for connection to screw heads	606-IECN
Safety flexible alligator clip	6007-IEC#

### Optional accessories

32



IMP57- Accessory for measuring Loop Impedance with high resolution

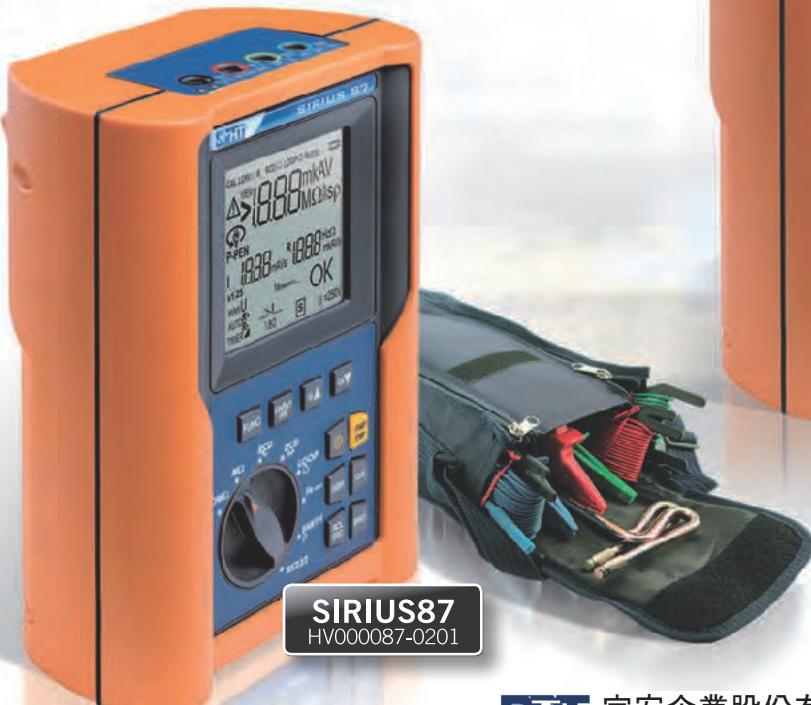

SIRIUS87  
HV000087-0201



MACROTEST5035  
HV005035-0201



宇宏企業股份有限公司

台北：三重區重新路五段609巷16號6樓之1 新竹：新竹縣竹北市台元26號4樓之10  
TEL:02-22782269 FAX:02-22782059 TEL:03-552-6779 FAX:03-552-6739  
<http://www.fluke-tektronix.tw> <http://www.radiotek.com.tw>



# MACROTEST 5035

Rel. 2.00 of 31/10/12

Instrument for safety test verify on electrical installations

Pag 1 of 3

## 1. ELECTRICAL SPECIFICATIONS

Accuracy is indicated as  $\pm$  [% readings + (no. of digits \* resolution) at  $23^\circ\text{C} \pm 5^\circ\text{C}$ ,  $<60\%$ HR]

### Continuity test on protective and equalizing conductors

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Accuracy (*)
0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
10.0 ÷ 99.9	0.1	

(\*) after cable calibration (which eliminates the cable resistance).

Test current:  $> 200\text{mA DC}$  for  $R \leq 5\Omega$  (included calibration); Resolution current:  $1\text{mA}$

Open-circuit voltage:  $4\text{V} \leq V_0 \leq 24\text{V}$

### Insulation Resistance (DC voltage)

Test voltage(V)	Range ( $M\Omega$ )	Resolution ( $M\Omega$ )	Accuracy
50	0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
	10.0 ÷ 49.9	0.1	
	50.0 ÷ 99.9	0.1	$\pm(5.0\% \text{rdg} + 2\text{dgt})$
100	0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
	10.0 ÷ 99.9	0.1	
	100.0 ÷ 199.9	0.1	$\pm(5.0\% \text{rdg} + 2\text{dgt})$
250	0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
	10.0 ÷ 199.9	0.1	
	200 ÷ 249	1	$\pm(5.0\% \text{rdg} + 2\text{dgt})$
	250 ÷ 499	1	
500	0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
	10.0 ÷ 199.9	0.1	
	200 ÷ 499	1	$\pm(5.0\% \text{rdg} + 2\text{dgt})$
	500 ÷ 999	1	
1000	0.01 ÷ 9.99	0.01	$\pm(2.0\% \text{rdg} + 2\text{dgt})$
	10.0 ÷ 199.9	0.1	
	200 ÷ 999	1	$\pm(5.0\% \text{rdg} + 2\text{dgt})$
	1000 ÷ 1999	1	

Open-circuit voltage: nominal test voltage  $-0\% +10\%$

Short circuit current:  $<6.0\text{mA}$  at  $500\text{V}$  test voltage

Nominal test current:  $<2.17\text{mA}$  on  $230\text{k}\Omega$  load (500V);  $>1\text{mA}$  su  $1\text{k}\Omega$  per  $V_{\text{nom}}$  (others)

Safety protection: error message at display for input voltage  $>30\text{V}$

### RCDs Tripping time

Range (ms)	Resolution (ms)	Accuracy
$\frac{1}{2} I_{\Delta N}, I_{\Delta N}$	1 ÷ 999	
$2 I_{\Delta N}$	1 ÷ 200 general	
	1 ÷ 250 selective	
$5 I_{\Delta N}$ RCD	1 ÷ 50 general 1 ÷ 160 selective	$\pm(2.0\% \text{rdg} + 2\text{dgt})$

Nominal trip-out currents:  $10\text{mA}, 30\text{mA}, 100\text{mA}, 300\text{mA}, 500\text{mA}$

RCDs type: AC, A, General and Selective

Phase-PE voltage:  $100\text{V} \div 265\text{V}$

Frequency:  $50\text{Hz} \pm 0.5\text{Hz}$

### Tripping current of RCDs

RCD type	$I_{\Delta N}$	Range $I_{\Delta N}$ (mA)	Resolution (mA)	Accuracy $I_{\Delta N}$
AC	$I_{\Delta N} \leq 10\text{mA}$	$(0.5 \div 1.4) I_{\Delta N}$	$0.1 I_{\Delta N}$	$-0\%, +(10.0\% I_{\Delta N})$
A		$(0.5 \div 2.4) I_{\Delta N}$		
AC	$I_{\Delta N} > 10\text{mA}$	$(0.5 \div 1.4) I_{\Delta N}$	$0.1 I_{\Delta N}$	$-0\%, +(10.0\% I_{\Delta N})$
A		$(0.5 \div 2.0) I_{\Delta N}$		



宇宏企業股份有限公司

台北：三重區重新路五段609巷16號6樓之1

TEL:02-22782269 FAX:02-22782059

http://www.fluke-tektronix.tw

新竹：新竹縣竹北市台元26號4樓之10

TEL:03-552-6779 FAX:03-552-6739

http://www.radiotek.com.tw



# MACROTEST 5035

Rel. 2.00 of 31/10/12

Instrument for safety test verify on electrical installations

Pag 2 of 3

## Contact voltage Ut

Range (V)	Resolution (V)	Accuracy
0 ÷ 2U <sub>lim</sub>	0.1	-0%, +(5.0% rdg + 3dgt)

U<sub>lim</sub> (UI): 25V , 50V

## Line Impedance (Phase-Phase, Phase-Neutral)

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Accuracy (*)
0.01 ÷ 19.99	0.01	$\pm(5.0\% \text{ rdg} + 3\text{dgt})$
20.0 ÷ 199.9	0.1	

(\*) 0.1 m $\Omega$  on range 0.0 ÷ 199.9 m $\Omega$  (with IMP57 optional accessory)

Maximum peak current: 3.65A (at 127V); 6.64A (at 230V); 11.5A (at 400V)

Test voltage: 100÷265V (Phase-Neutral) / 100÷460V (Phase-Phase); 50Hz ± 0.5Hz

## Fault Loop Impedance (Phase-Ground)

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Accuracy (*)
0.01 ÷ 19.99	0.01	$\pm(5.0\% \text{ rdg} + 3\text{dgt})$
20.0 ÷ 199.9	0.1	
200 ÷ 1999	1	

(\*) 0.1 m $\Omega$  on range 0.0 ÷ 199.9 m $\Omega$  (with IMP57 optional accessory)

Maximum peak current: 3.65A (at 127V); 6.64A (at 230V)

Test voltage: 100÷265V (Phase-Ground); 50Hz ± 0.5Hz

## Fault Loop Resistance R<sub>A</sub> without RCDs tripping

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Accuracy
1 ÷ 1999	1	-0%, +(5.0% rdg + 3dgt)

Test current: 0.5 I<sub>AN</sub> set on Ut test

15mA on Ra15mA test

## Earth Resistance with rods

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Accuracy (*)
0.01 ÷ 19.99	0.01	$\pm(5.0\% \text{ rdg} + 3\text{dgt})$
20.0 ÷ 199.9	0.1	
200 ÷ 1999	1	

Test current: &lt;10mA – 77.5Hz

Open-circuit voltage: &lt; 20V rms

## Earth resistivity

Range $\rho$ (*)	Resolution	Accuracy (*)
0.06 ÷ 19.99 $\Omega\text{m}$	0.01 $\Omega\text{m}$	$\pm(5.0\% \text{ rdg} + 3\text{dgt})$
20.0 ÷ 199.9 $\Omega\text{m}$	0.1 $\Omega\text{m}$	
200 ÷ 1999 $\Omega\text{m}$	1 $\Omega\text{m}$	
2.00 ÷ 99.99 $\text{k}\Omega\text{m}$	0.01 $\text{k}\Omega\text{m}$	
100.0 ÷ 125.5 $\text{k}\Omega\text{m}$	0.1 $\text{k}\Omega\text{m}$	

(\*) with distance d=10m

Distance range d: 1 ÷ 10m

Test current: &lt;10mA – 77.5Hz

Open-circuit voltage: &lt; 20V rms

## Voltage (RCD, LOOP, Phase Sequence)

Range (V)	Resolution (V)	Accuracy
15 ÷ 460	1	$\pm(3.0\% \text{ rdg} + 2\text{dgt})$

## Frequency

Range (Hz)	Resolution (Hz)	Accuracy
47.0 ÷ 63.6	0.1	$\pm(0.1\% \text{ rdg} + 1\text{dgt})$



宇宏企業股份有限公司

台北:三重區重新路五段609巷16號6樓之1

TEL:02-22782269 FAX:02-22782059

http://www.fluke-tektronix.tw

新竹:新竹縣竹北市台元26號4樓之10

TEL:03-552-6779 FAX:03-552-6739

http://www.radiotek.com.tw



# MACROTEST 5035

Rel. 2.00 of 31/10/12

Instrument for safety test verify on electrical installations

Pag 3 of 3

## 2. GENERAL SPECIFICATIONS

### DISPLAY AND MEMORY:

Features:	LCD Custom 65x65mm
Memory:	350 locations

### POWER SUPPLY:

Batteries:	6 batteries 1.5V type LR6-AA-AM3-MN 1500
------------	--

### MECHANICAL FEATURES:

Dimensions:	225 (W)x165(L)x105(D) mm
Weight (included batteries):	about 1.2kg

### WORKING ENVIRONMENTAL CONDITIONS:

Reference temperature:	23°C ± 5°C
Working temperature:	0° ÷ 40°C
Allowed relative humidity:	< 80% HR
Storage temperature:	-10 ÷ 60°C
Storage humidity:	< 80% HR

### TEST VERIFIES REFERENCE STANDARDS:

Continuity test with 200mA:	IEC/EN61557-4
Insulation resistance:	IEC/EN61557-2
Earth resistance:	IEC/EN61557-5
Fault Loop Impedance:	IEC/EN61557-3
RCDs test:	IEC/EN61557-6
Phase sequence:	IEC/EN61557-7

### GENERAL REFERENCE STANDARDS:

Safety of measuring instruments:	IEC/EN61010-1 + A2(1997)
Product type standard:	IEC/EN61557-1,2,3,4,5,6,7
Insulation:	double insulation
Pollution degree:	2
Overvoltage category:	CAT III 460V~ (between inputs) CAT III 265V~ (to ground)
Max height of use:	2000m
EMC:	EN61326-1 (1998) + A1 (1999)

This instrument complies with the requirements of the European Low Voltage Directives 2006/95/EEC (LVD) and EMC 2004/108/EEC



宇宏企業股份有限公司

台北：三重區重新路五段609巷16號6樓之1

TEL:02-22782269 FAX:02-22782059

<http://www.fluke-tektronix.tw>

新竹：新竹縣竹北市台元26號4樓之10

TEL:03-552-6779 FAX:03-552-6739

<http://www.radiotek.com.tw>