

# COMBI419 - COMBI420

## COMBINED MULTIFUNCTION INSTRUMENTS FOR TESTS ON CIVIL AND INDUSTRIAL ELECTRIC SYSTEMS

Models COMBI419 and COMBI420 are innovative instruments for carrying out tests on electric systems in compliance with standard IEC 60364, for measuring and saving environmental parameters (only COMBI420) of leakage current and of electric quantities such as active power, harmonics, PF on single-phase systems (only COMBI420). These instruments are extremely simple to use and have a wide range of functions which can be selected through the practical multi-language menu. Each model also allows carrying out measurements by using a switch probe (optional accessory PR400), which makes it much easier to carry out more measurements one after the other. The help on line, which can be consulted by the user and is available for all functions, provides a very useful help in connecting the instrument to the system to be tested.

FUNCTIONS	COMBI419	COMBI420
Continuity with 200mA	•	•
Insulation with 50,100,250,500,1000VDC	•	•
Tripping time of RCD type A, AC standard and selective up to 500mA	•	•
Tripping current of RCD type A, AC up to 500 mA	•	•
Loop/line P-N, P-P, P-PE impedance also with high resolution (0.1mΩ) (with optional accessory IMP57)	•	•
Total earth resistance without RCD tripping	•	•
Contact voltage	•	•
Phase sequence indication	•	•
AUTO test (total earth resistance, RCD test, insulation test) on the tested sockets	•	•
Measurement of powers and PF in single-phase systems		•
Voltage and current harmonics up to the 49th with calculation of the THD%		•
Environmental parameter measurement (temperature, humidity, illuminance with optional probes)		•
Leakage current measurement (with optional clamp HT96U)	•	•
Activation of measurements with optional remote probe PR400	•	•
Help on line on the display	•	•
Storage of results	•	•
Optical/USB interface for connection to PC	•	•
Dimensions (LxWxH) mm	222x162x57	222x162x57
Weight (batteries included)	1 Kg	1 Kg

ACCESSORIES	Code
<b>Standard</b>	
3-terminal cable with SHUKO plug	C2033X
Set of 3 cables + 3 alligator clips + 1 test leads	UNIVERSALKIT
Carrying bag	BORSA75N
ISO9000 calibration certificate	
User manual on CD-ROM	
Quick reference guide	
<b>Optional</b>	
PC Windows software + optical / USB cable	TOPVIEW2006
Clamp 1-100-1000A/1V AC, diameter 54mm	HT96U
Temperature/Humidity probe (only COMBI420)	HT52/05
Illuminance (Lux) probe (only COMBI420)	HT53/05
Switch probe	PR400
Accessory for Loop impedance with high resolution	IMP57
Hands-free kit	SP-0400
Magnetic adapter for connection to screw heads	606-IECN
Safety flexible alligator clip	6007-IEC#

Some optional accessories



PR400  
Switch probe



HT96U  
clamp for AC  
leakage current



SP-0400  
Hands-free kit



COMBI419  
HV000419



COMBI420  
HV000420




[www.youtube.com/user/HTInstruments1](http://www.youtube.com/user/HTInstruments1)




宇宏企業股份有限公司

台北: 三重區重新路五段609巷16號6樓之1 新竹: 新竹縣竹北市台元26號4樓之10  
TEL: 02-22782269 FAX: 02-22782059 TEL: 03-552-6779 FAX: 03-552-6739  
<http://www.fluke-tektronix.tw> <http://www.radiotek.com.tw>

## 1. MAIN FEATURES OF FAMILY 400 METERS

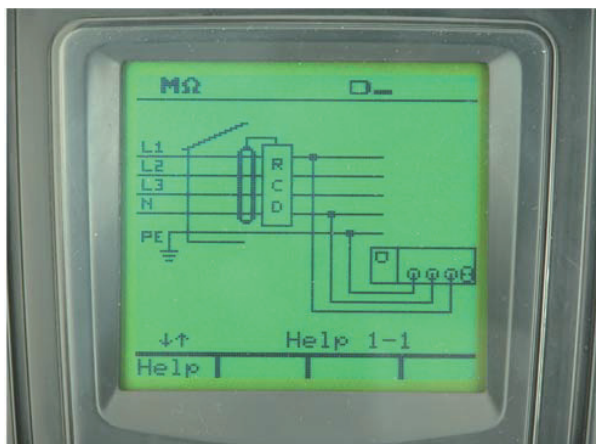

Help on line (available on each function) to support the user while connecting the instrument to the installation under measurement

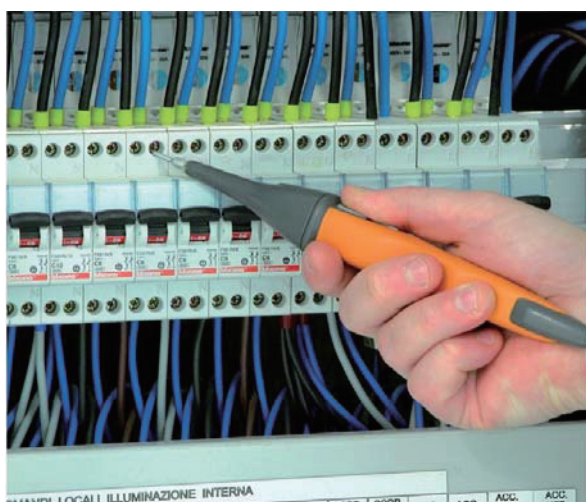

Each model permits the Start of measurements with remote probe (PR400 optional accessory)



General menu to quickly selection of available test performed by meter  
(COMBI419 and COMBI420 models only)



## 1. MODELS AND FEATURES

Measurements	ISO410	SPEED418	COMBI419	COMBI420
Continuity test on protective conductor with 200mA	✓		✓	✓
Insulation resistance 50-100-250-500-1000VDC	✓		✓	✓
RCDs tripping time and current (general and selective, AC and A types) 10-30-100-300-500-650mA		✓	✓	✓
Contact voltage Ut		✓	✓	✓
Loop impedance P-N, P-P, P-PE		✓	✓	✓
Loop impedance P-N, P-P, P-PE with high resolution (0.1mΩ) with IMP57 optional accessory		✓	✓	✓
Prospective short circuit current		✓	✓	✓
Global earth resistance Ra without RCDs tripping		✓	✓	✓
Phase sequence		✓	✓	✓
Leakage current (with HT96U optional accessory)			✓	✓
AUTOMATIC test (Ra, RCD time, Insulation) directly on outlet			✓	✓
ACTRMS voltage and current in Single phase system				✓
Active, reactive, apparent powers and power factor in Single phase system				✓
Harmonic analysis U, I, up to 49 <sup>th</sup> order and THD%				✓
Environmental parameters (°C, %HR, Lux,)				✓
Using optional remote probe for activation of tests	✓	✓	✓	✓
Contextual help at display	✓	✓	✓	✓
Memory and PC interface	✓	✓	✓	✓



## 2. ELECTRICAL SPECIFICATIONS

### Continuity test on protective conductors

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Uncertainty (*)	Category of measure
0.00 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	CAT III 240V to Ground CAT III 415V between inputs
10.0 ÷ 99.9	0.1		

(\*) after cable calibration which eliminates the cable resistance

Test current: >200mA DC per  $R \leq 5\Omega$  (calibration included) ; Current measurement resolution: 1mAOpen leads voltage:  $4 < V_0 < 24V$ 

### RCDs tripping time

Range (ms)	Resolution (ms)	Uncertainty	Category of measure
$\frac{1}{2} I_{\Delta N}, I_{\Delta N}$	1 ÷ 999	$\pm(2.0\%rdg + 2 dgt)$	CAT III 240V to Ground CAT III 415V between inputs
2 $I_{\Delta N}$	1 ÷ 200 general		
	1 ÷ 250 selective		
5 $I_{\Delta N}$ RCD	1 ÷ 50 general		
	1 ÷ 160 selective		

Nominal tripping current: 10mA, 30mA, 100mA, 300mA, 500mA, 650mA

RCD type: AC, A, general and selective

Phase-ground voltage: (110V ÷ 240V)  $\pm 10\%$ Frequency: 50Hz  $\pm 0.5$ Hz, 60Hz  $\pm 0.5$ Hz

Voltage contact limits: 25V or 50V

### RCDs tripping current (general, AC and A types)

RCD's type	$I_{\Delta N}$	Range $I_{\Delta N}$ (mA)	Resolution (mA)	Uncertainty	Category of measure
AC	$I_{\Delta N} \leq 10mA$	$(0.5 \div 1.4) I_{\Delta N}$	0.1 $I_{\Delta N}$	0%, +10%rdg	CAT III 240V to Ground CAT III 415V between inputs
A		$(0.5 \div 2) I_{\Delta N}$			
AC	$I_{\Delta N} > 10mA$	$(0.5 \div 1.4) I_{\Delta N}$			
A		$(0.5 \div 2) I_{\Delta N}$			

### Insulation resistance (DC voltage) (COMBI419-COMBI420)

Test voltage (V)	Range (M $\Omega$ )	Resolution (M $\Omega$ )	Uncertainty	Category of measure
50	0.01 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	CAT III 240V to Ground CAT III 415V between inputs
	10.0 ÷ 49.9	0.1	$\pm(5.0\%rdg + 2dgt)$	
	50.0 ÷ 99.9			
100	0.01 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	
	10.0 ÷ 99.9	0.1	$\pm(5.0\%rdg + 2dgt)$	
	100 ÷ 199	1		
250	0.01 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	
	10.0 ÷ 99.9	0.1		
	100 ÷ 249	1	$\pm(5.0\%rdg + 2dgt)$	
	250 ÷ 499			
500	0.01 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	
	10.0 ÷ 99.9	0.1		
	100 ÷ 499	1	$\pm(5.0\%rdg + 2dgt)$	
	500 ÷ 999			
1000	0.01 ÷ 9.99	0.01	$\pm(2.0\%rdg + 2dgt)$	
	10.0 ÷ 99.9	0.1		
	100 ÷ 999	1	$\pm(5.0\%rdg + 2dgt)$	
	1000 ÷ 1999			

Open leads voltage: 1.25 x nominal test voltage

voltage measurement resolution: 1V

Short circuit current: &lt;15mA (peak) for each test voltage

Nominal current: >2.2mA with 230k $\Omega$  @, 500V; 1mA with 1M $\Omega$  @ other test voltage



# COMBI419

Rel. 1.06 - 14/05/12

Multifunctional meter for safety test on installations

Pag 4 - 5

## Contact voltage $U_t$

Range (V)	Resolution (V)	Uncertainty	Category of measure
0 ÷ 2U <sub>lim</sub>	0.1	-0%, +(2.0%rdg + 2dgt)	CAT III 240V to Ground CAT III 415V between inputs

U<sub>lim</sub> (UI): 25V , 50V

## Loop impedance P-P, P-N, P-PE TT/TN systems

Range ( $\Omega$ )	Resolution ( $\Omega$ ) (*)	Uncertainty	Category of measure
0.01 ÷ 9.99	0.01	$\pm(5.0\%rdg + 3dgt)$	CAT III 240V to Ground CAT III 415V between inputs
10.0 ÷ 199.9	0.1		
200 ÷ 1999 (only P-PE)	1		

(\*) 0.1m $\Omega$  in 0.0 ÷ 199.9 m $\Omega$  range (with option accessory IMP57)

Maximum peak current: 3A @ 127V, 6A @ 230V, 10A @ 400V

Test voltage: (110÷240V)  $\pm 10\%$  (P-N, P-PE) ; 50Hz  $\pm 0.5$ Hz, 60Hz  $\pm 0.5$ Hz(110÷415V)  $\pm 10\%$  (P-P); 50Hz  $\pm 0.5$ Hz, 60Hz  $\pm 0.5$ Hz

## Loop impedance P-P, P-N, P-PE IT systems

Range (mA)	Resolution (mA)	Uncertainty	Category of measure
5 ÷ 999	1	$\pm(5.0\%rdg + 3dgt)$	CAT III 240V to Ground CAT III 415V between inputs

U<sub>lim</sub> (UI): 25V , 50V

## Global Earth Resistance $R_A$ without tripping the RCD

Range ( $\Omega$ )	Resolution ( $\Omega$ )	Uncertainty	Category of measure
0.01 ÷ 9.99	0.01	$\pm(5.0\%rdg + 1.0\Omega)$	CAT III 240V to Ground CAT III 415V between inputs
10.0 ÷ 199.9	0.1		
200 ÷ 1999 (solo F-PE)	1		

Test current @ 265V: &lt;15mA

Test voltage: (110÷240V)  $\pm 10\%$  (phase-neutral/PE); 50Hz  $\pm 0.5$ Hz, 60Hz  $\pm 0.5$ HzU<sub>lim</sub> (UI): 25V , 50V

## Phase sequence with 1 or 2 wires

Range (V)	Results displayed	Category of measure
(100 ÷ 240) $\pm 10\%$	"123" → correct phase sequence "132" → wrong phase sequence "11-" → phase coincidence	CAT III 240V to Ground CAT III 415V between inputs

The instrument detects the phase sequence by touching the hot wire. The detection is not performed on insulated cables.

Frequency: 50Hz  $\pm 0.5$ Hz, 60Hz  $\pm 0.5$ Hz

## Leakage current AC TRMS (I<sub>n1</sub> input)

Range (mV)	Resolution (mV)	Uncertainty	Category of measure
1 ÷ 1200	0.1	$\pm(1.0\%rdg + 2dgt)$	CAT I 30V to Ground and between inputs

Frequency range: 50Hz ÷ 60Hz



宇宏企業股份有限公司

台北：三重區重新路五段609巷16號6樓之1

TEL:02-22782269 FAX:02-22782059

http://www.fluke-tektronix.tw

新竹：新竹縣竹北市台元26號4樓之10

TEL:03-552-6779 FAX:03-552-6739

http://www.radiotek.com.tw



### 3. GENERAL SPECIFICATIONS

**MECHANICAL FEATURES**

Dimensions:	235 (L)x165(La)x75(H)mm
Weight (batteries included):	about 1.2kg
Protection degree:	IP50

**MEMORY AND SERIAL INTERFACE**

Each measurement can be stored

Memory:	>600 locations
PC communication port:	optical / USB

**DISPLAY:**

Features:	graphic LCD with backlight
-----------	----------------------------

**POWER SUPPLY:**

Batteries:	6x 1.5V type LR6, AA, AM3, MN 1500
Battery life:	> 600 measurements (without using the timer)

**ENVIRONMENTAL CONDITIONS:**

Reference temperature of calibration:	23°C ± 5°C
Working temperature:	0° ÷ 40°C
Working humidity:	< 80%HR
Storage temperature (batteries not included):	-10 ÷ 60°C
Storage humidity:	< 80%HR

**GENERAL REFERENCE STANDARDS:**

Safety:	IEC/EN61010-1, IEC/EN61557-1, -2, -3, -4, -6, -7
Technical literature:	IEC/EN61187
Safety of accessories:	IEC/EN61010-031, IEC/EN61010-2-032
LOWΩ (200mA):	IEC/EN61557-4
MΩ:	IEC/EN61557-2
RCD:	IEC/EN61557-6
LOOP P-P, P-N, P-PE:	IEC/EN61557-3
Ra 15 <sub>mA</sub>	IEC/EN61557-3
123:	IEC 61557-7
Insulation:	double insulation
Pollution degree:	2
Max altitude:	2000m
Overvoltage category:	CAT III 240V to ground, max 415V among inputs

**This instrument complies with the requirements of the European Low Voltage Directives 2006/95/EEC (LVD) and EMC 2004/108/EEC**